


2

1

REPLACEABLE THERMOCOUPLES & FITTINGS

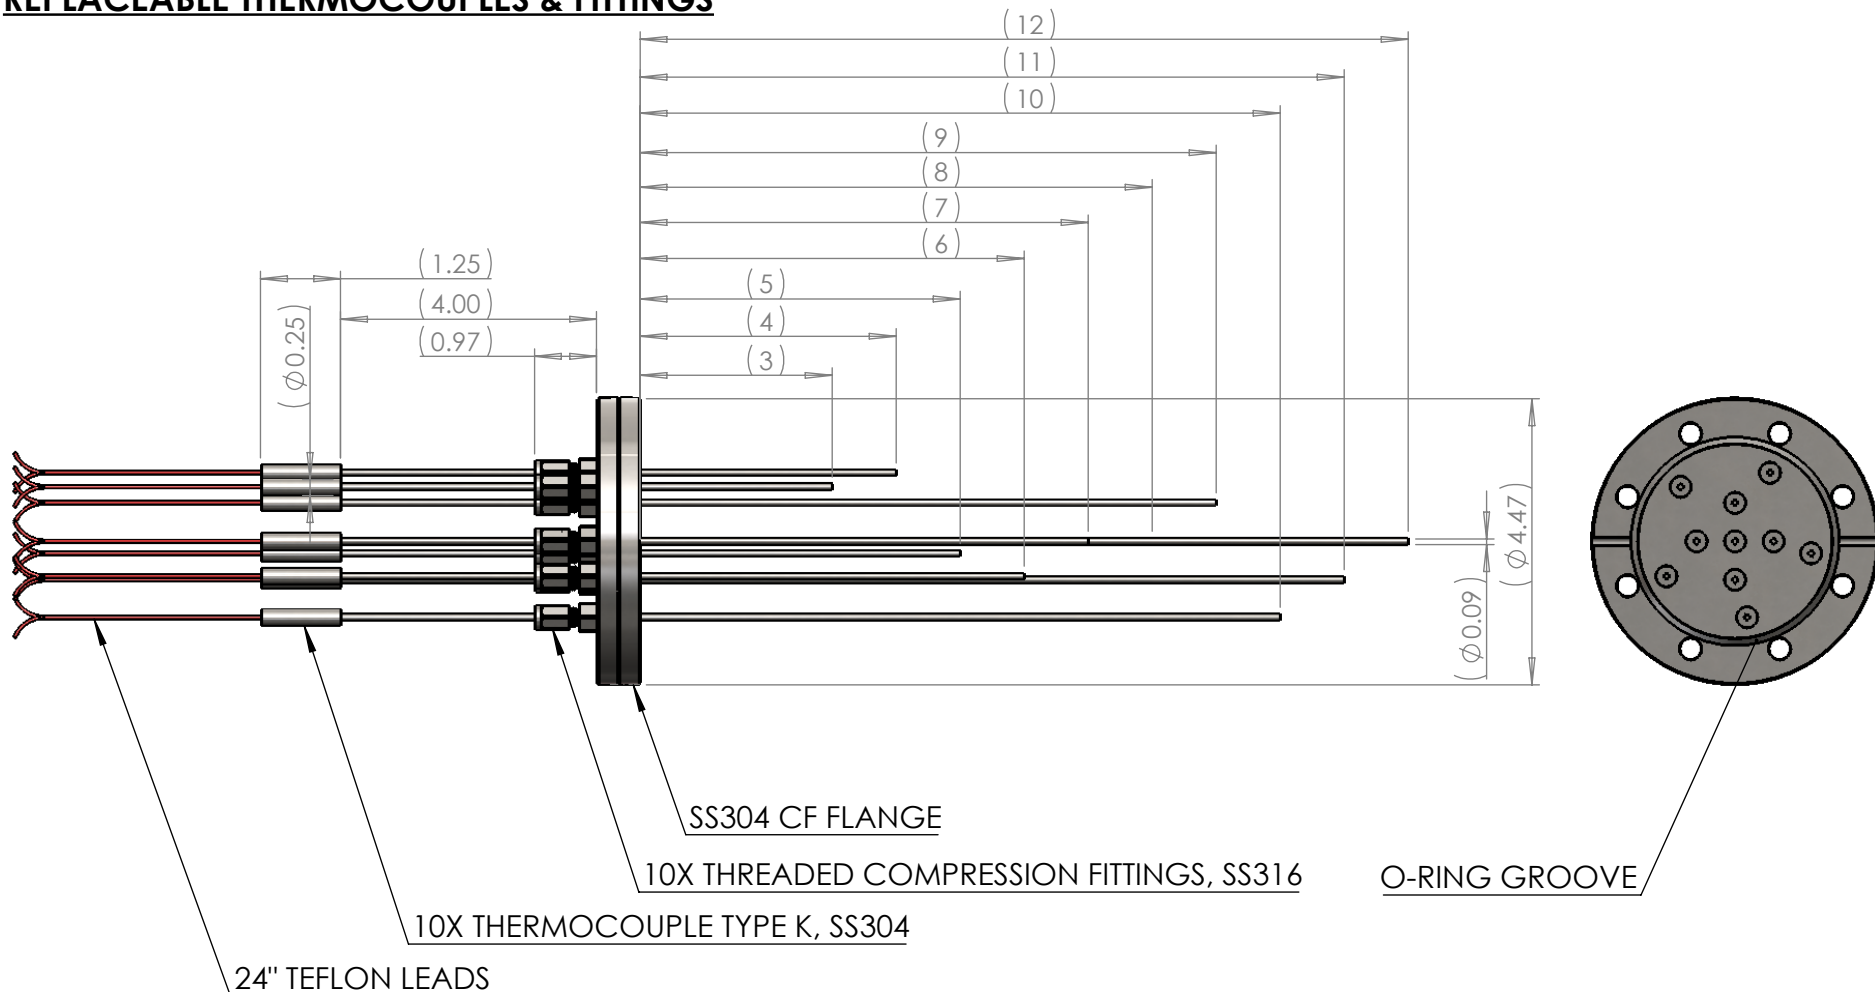

B

B

A

NOTES

1. COMPRESSION FITTINGS THREADED INTO CF FLANGE
2. THERMOCOUPLES COMPRESSED INTO FITTINGS
3. EASY TO REPLACE COMPONENTS
4. VACUUM COMPATIBLE TO 10^{-9} ATM.CC/SEC
5. MAX. TEMP. DEPENDENT ON LEAD AND O-RING MATERIALS. CAN BE UP TO 400°C.
6. ALL FEATURES AND MATERIALS ARE CUSTOMIZABLE

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BCE INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BCE INC. IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
 TOLERANCES:
 FRACTIONAL ±
 ANGULAR: MACH ± BEND ±
 TWO PLACE DECIMAL ± .010
 THREE PLACE DECIMAL ± .005

INTERPRET GEOMETRIC
 TOLERANCING PER:

MATERIAL
 SEE DWG

FINISH
 N/A

DO NOT SCALE DRAWING

TITLE:

**REPLACEABLE 10X TC
 FEEDTHROUGH**

SIZE

A

DWG. NO.

BCE10258

REV

A

SCALE: NTS

WEIGHT: N/A

SHEET 1 OF 1

2

1

A