

4





3

2

1

B

B

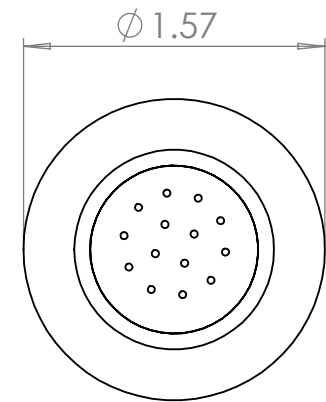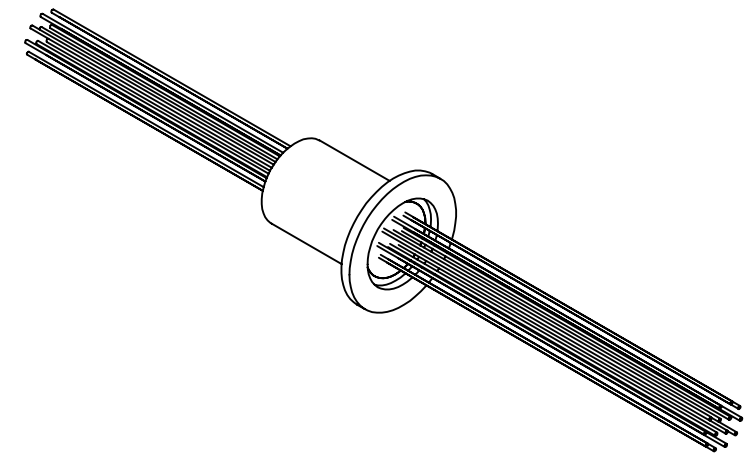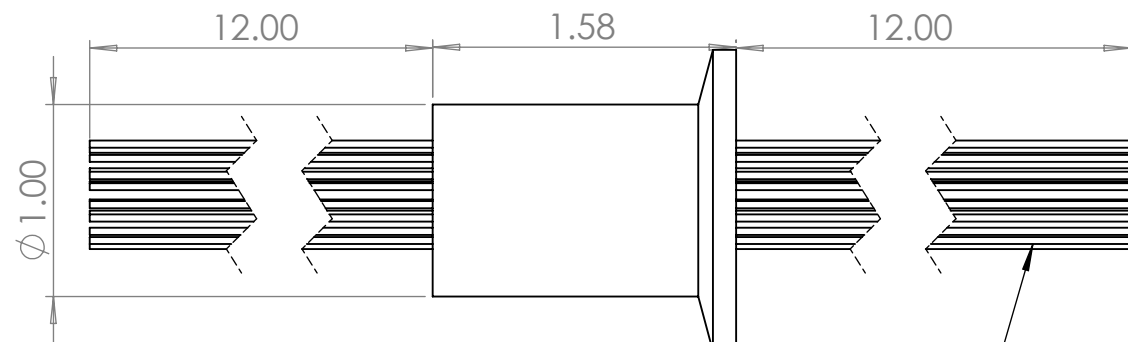

KF 25 SS304

QTY: (14) 26 AWG
TEFLON INSULATED LEADS

A

A

NOTES:

- 1. OPERATING TEMPERATURE: -50C to 40C
- 2. Vacuum Leak Rating: 10^{-7} ATM-CC/Sec

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DRAWN		A.M	
CHECKED			
ENG APPR.			
MFG APPR.			
Q.A.			
COMMENTS:		THIS DRAWING IS FOR REFERENCE ONLY. FINAL PRODUCT MAY DIFFER.	



TITLE:
14 WIRE FEEDTHROUGH

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BELILOVE CO. ENGINEERS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BELILOVE CO. ENGINEERS IS PROHIBITED.

INTERPRET GEOMETRIC TOLERANCING PER:	Q.A.
MATERIAL	SEE DWG
FINISH	SEE DWG
DO NOT SCALE DRAWING	

SIZE	DWG. NO.	REV
B	BCE10662	-
SCALE: NTS	WEIGHT: N/A	SHEET 1 OF 1

4

3

2

1