


Power Feedthrough, 1200 Volts, 3 Pins, 1.57" QF/KF UHV Rated, Bakeable to 450°C

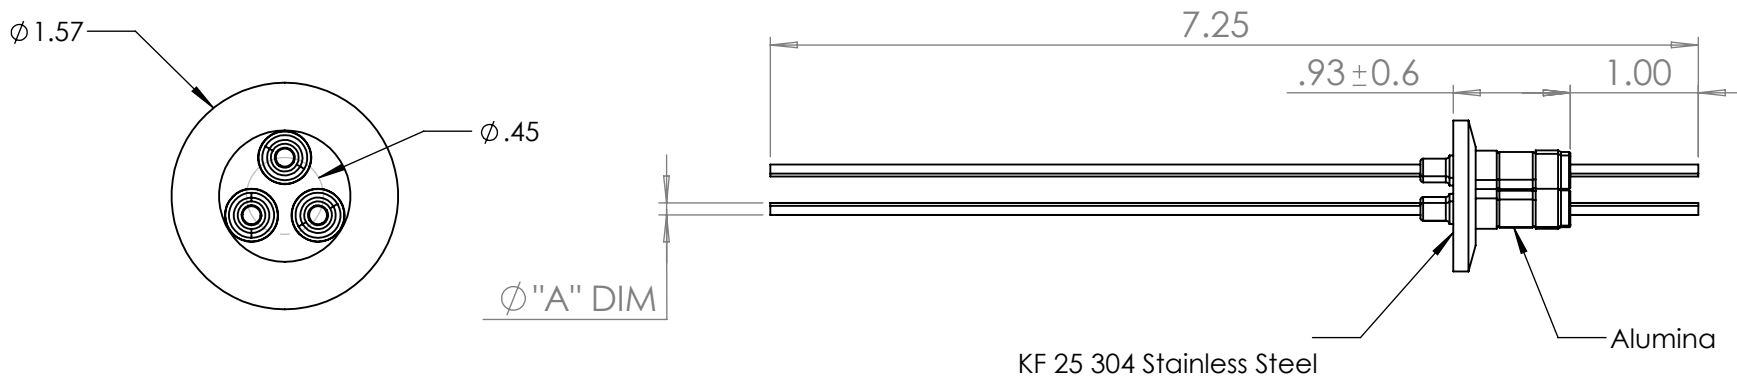

NOTES

1. Nickel Conductor
2. Voltage: 120 Volts DC
3. Current: 15 AMPS
4. Temperature Rating: -100 to 200°C

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BELLOVE CO. ENGINEERS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BELLOVE CO. ENGINEERS IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		BCE	
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL \pm ANGULAR: MACH \pm BEND \pm TWO PLACE DECIMAL $\pm .010$ THREE PLACE DECIMAL $\pm .005$			
INTERPRET GEOMETRIC TOLERANCING PER:		TITLE: POWER FEEDTHROUGH 120 VOLTS, 3 PINS 1.57" QF/KF	
MATERIAL	SEE DWG	SIZE	DWG. NO.
FINISH	N/A	A	BCE 10670
DO NOT SCALE DRAWING		SCALE: NTS	WEIGHT: N/A
		REV -	
		SHEET 1 OF 1	