


4

3

2

1

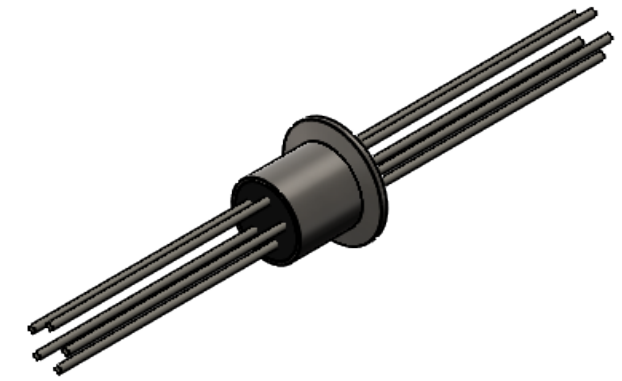

B

B

**5X 10 AWG Copper Stranded
Teflon Insulated 12" Leads
(Black, Red & White, Purple, White & Green)**


**5X 10 AWG Copper Stranded
Teflon Insulated 12" Leads
(Black, Red & White, Purple, White & Green)**

304 SS K40 Flange


1.58

~12 in

~12 in

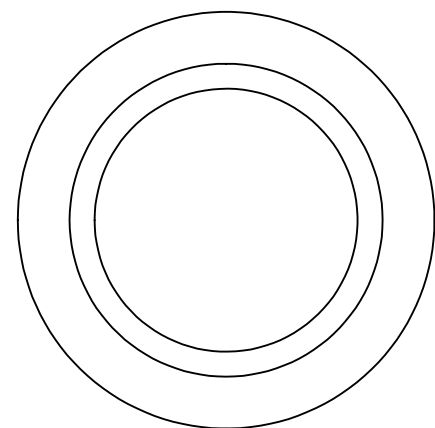

Atmosphere Side

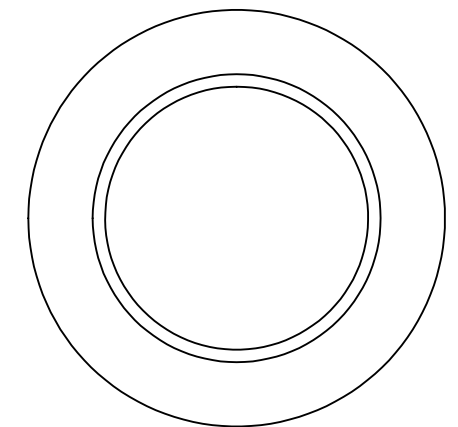

Vacuum Side

A

A

Notes:

1. Operating Temperatures: -40C to 50C
2. Vacuum Rating: 10^{-2}
3. Leads will meet or exceed 12 in

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES		DRAWN	A.M
TOLERANCES:		CHECKED	
FRACTIONAL ±		ENG APPR.	
ANGULAR: MACH ± BEND ±		MFG APPR.	
TWO PLACE DECIMAL ±		Q.A.	
THREE PLACE DECIMAL ±		COMMENTS:	
INTERPRET GEOMETRIC TOLERANCING PER:		THIS DRAWING IS FOR REFERENCE ONLY.	
MATERIAL		FINAL PRODUCT MAY DIFFER.	
FINISH			
DO NOT SCALE DRAWING			

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BELILOVE CO. ENGINEERS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BELILOVE CO. ENGINEERS IS PROHIBITED.



TITLE:		
R 5 Wire Feedthrough		
SIZE	DWG. NO.	REV
B	BCE10427	2
SCALE: NTS	WEIGHT: N/A	SHEET 1 OF 1

4

3

2

1