



4

3


2

1

ISOMETRIC VIEW

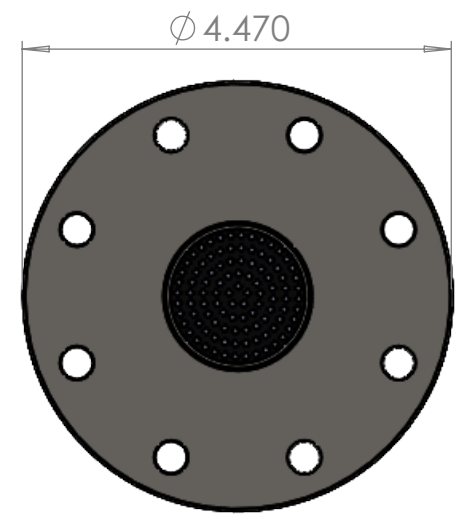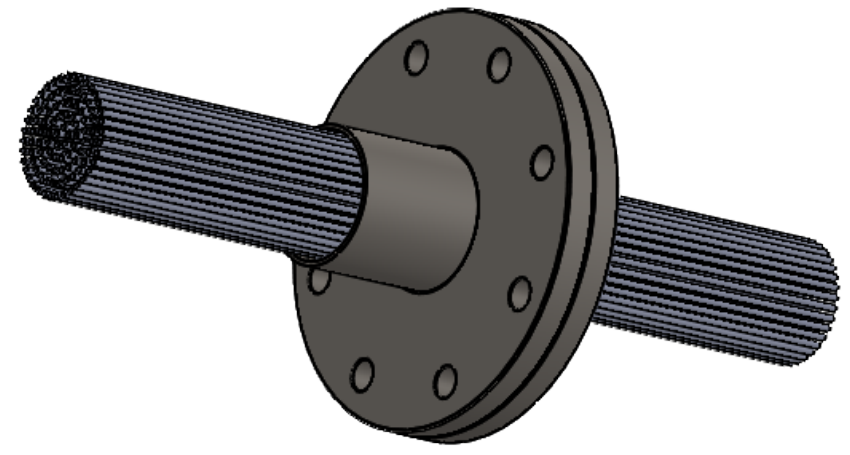


Atmosphere

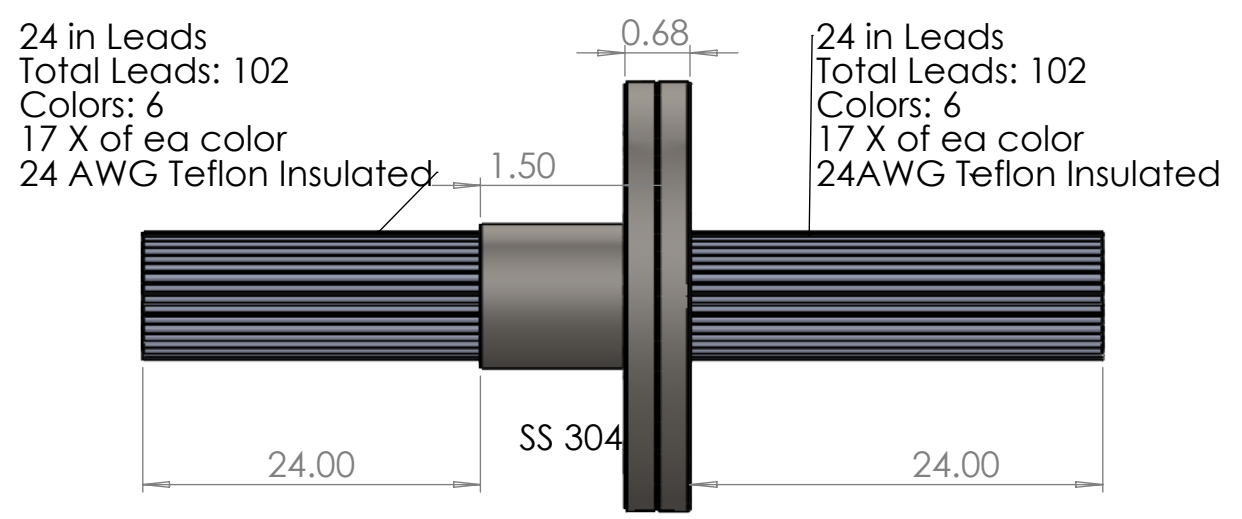

24 in Leads
Total Leads: 102
Colors: 6
17 X of ea color
24 AWG Teflon Insulated

24 in Leads
Total Leads: 102
Colors: 6
17 X of ea color
24AWG Teflon Insulated

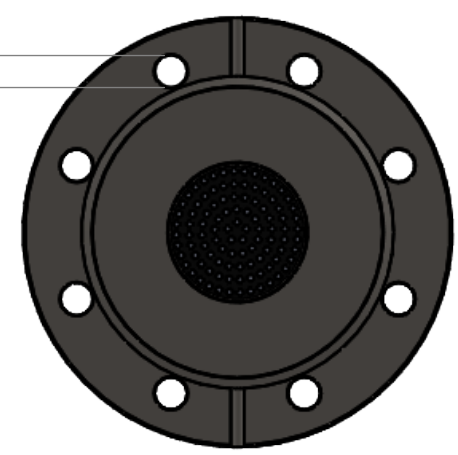

Vacuum

NOTES

1. Continuous Operating Temperature: -55 °C to 125 °C

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BELILOVE CO. ENGINEERS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BELILOVE CO. ENGINEERS IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES		DRAWN	A.M
TOLERANCES:		CHECKED	
FRACTIONAL ±		ENG APPR.	
ANGULAR: MACH ± BEND ±		MFG APPR.	
TWO PLACE DECIMAL ±		Q.A.	
THREE PLACE DECIMAL ±		COMMENTS:	
INTERPRET GEOMETRIC TOLERANCING PER:	MATERIAL	THIS DRAWING IS FOR REFERENCE ONLY.	
	SEE DWG	FINAL PRODUCT MAY DIFFER.	
FINISH	SEE DWG		
DO NOT SCALE DRAWING			

BCE		
TITLE:		
Tvk FEEDTHROUGH		
SIZE	DWG. NO.	REV
B	BCE10406	A
SCALE: NTS	WEIGHT: N/A	SHEET 1 OF 1

4

3

2

1

B

B

A

A